
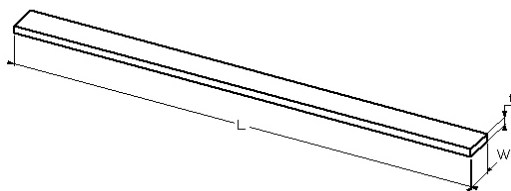


SBM 直線タイプ メッキ処理あり



T2

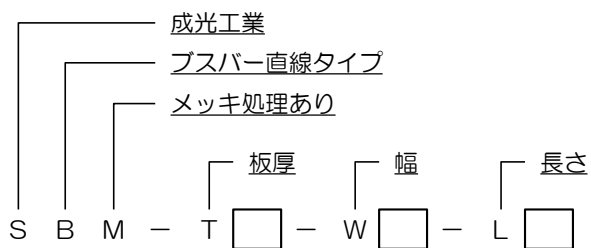

寸法			断面積	許容電流
T (板厚)	W (幅)	L (長さ)		
2	10	125	20	50
		250		
		375		
		500		
		625		
		750		
		875		
		1,000		
		1,125		
		1,250		
		1,375		
1,500				
2	12	125	24	50
		250		
		375		
		500		
		625		
		750		
		875		
		1,000		
		1,125		
		1,250		
		1,375		
1,500				
2	15	125	30	75
		250		
		375		
		500		
		625		
		750		
		875		
		1,000		
		1,125		
		1,250		
		1,375		
1,500				
2	20	125	40	75
		250		
		375		
		500		
		625		
		750		
		875		
		1,000		
		1,125		
		1,250		
		1,375		
1,500				

SBM 直線タイプ メッキ処理あり

T2

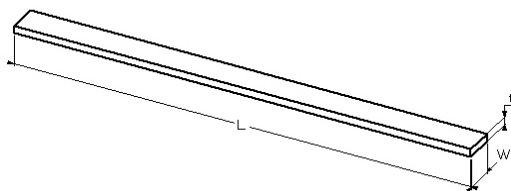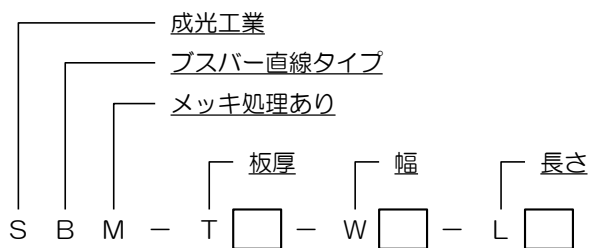

寸法			断面積	許容電流
T (板厚)	W (幅)	L (長さ)		
2	25	125	50	75
		250		
		375		
		500		
		625		
		750		
		875		
		1,000		
		1,125		
		1,250		
		1,375		
		1,500		
2	30	125	60	100
		250		
		375		
		500		
		625		
		750		
		875		
		1,000		
		1,125		
		1,250		
		1,375		
		1,500		