


寸法			タップ数	断面積	許容電流
T (板厚)	W (幅)	L (長さ)			
5	12	125	5	60	100
		250	10		
		375	15		
		500	20		
		625	25		
		750	30		
		875	35		
		1,000	40		
		1,125	45		
		1,250	50		
		1,375	55		
		1,500	60		
5	15	125	5	75	150
		250	10		
		375	15		
		500	20		
		625	25		
		750	30		
		875	35		
		1,000	40		
		1,125	45		
		1,250	50		
		1,375	55		
		1,500	60		
5	20	125	5	100	175
		250	10		
		375	15		
		500	20		
		625	25		
		750	30		
		875	35		
		1,000	40		
		1,125	45		
		1,250	50		
		1,375	55		
		1,500	60		

成光工業  
フスパー直線タイプ

S B - T  - W  - L  - M

板厚 幅 長さ タップ径

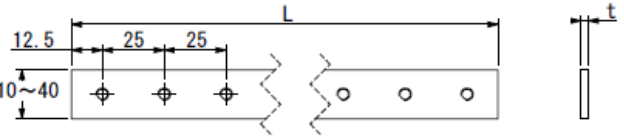

寸法			タップ数	断面積	許容電流
T (板厚)	W (幅)	L (長さ)			
5	25	125	5	125	200
		250	10		
		375	15		
		500	20		
		625	25		
		750	30		
		875	35		
		1,000	40		
		1,125	45		
		1,250	50		
		1,375	55		
		1,500	60		
5	30	125	5	150	250
		250	10		
		375	15		
		500	20		
		625	25		
		750	30		
		875	35		
		1,000	40		
		1,125	45		
		1,250	50		
		1,375	55		
		1,500	60		
5	40	125	5	200	350
		250	10		
		375	15		
		500	20		
		625	25		
		750	30		
		875	35		
		1,000	40		
		1,125	45		
		1,250	50		
		1,375	55		
		1,500	60		


# SB 直線タイプ メッキ処理なし

T5

成光工業  
ブスバー直線タイプ

S B - T  - W  - L  - M

板厚 幅 長さ タップ径φ50~80

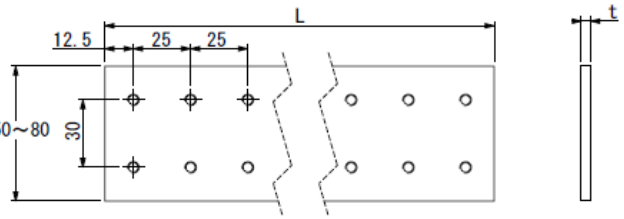

寸法			タップ数	断面積	許容電流
T (板厚)	W (幅)	L (長さ)			
5	50	125	10	250	350
		250	20		
		375	30		
		500	40		
		625	50		
		750	60		
		875	70		
		1,000	80		
		1,125	90		
		1,250	100		
		1,375	110		
		1,500	120		
5	60	125	10	300	400
		250	20		
		375	30		
		500	40		
		625	50		
		750	60		
		875	70		
		1,000	80		
		1,125	90		
		1,250	100		
		1,375	110		
		1,500	120		
5	75	125	10	375	450
		250	20		
		375	30		
		500	40		
		625	50		
		750	60		
		875	70		
		1,000	80		
		1,125	90		
		1,250	100		
		1,375	110		
		1,500	120		